



DIN9834 自润导套 DIN9834 Oilless Guide Bushing

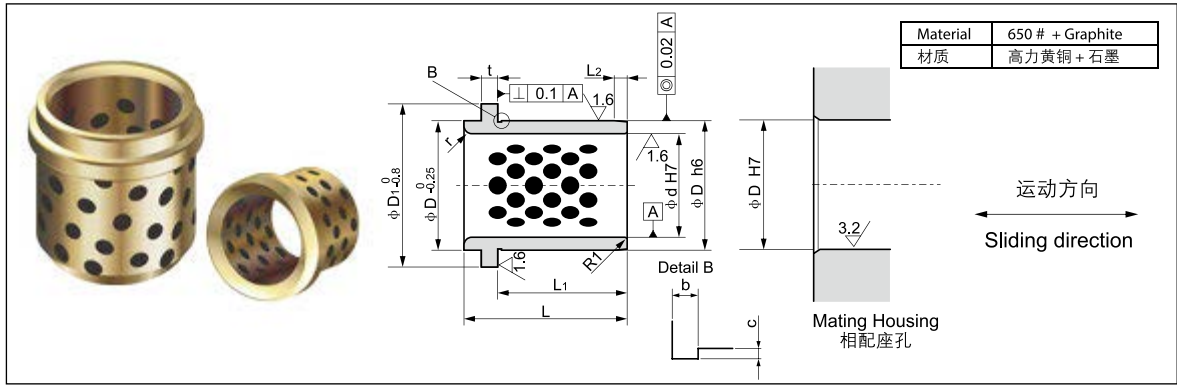

单位 (Unit): mm

型号规格 Standard No.	d H7		D h6		L	D ₁	L ₁	L ₂	t	r	bxc	P
DIN9834-025	25	$\begin{smallmatrix} +0.021 \\ 0 \end{smallmatrix}$	32	$\begin{smallmatrix} 0 \\ -0.016 \end{smallmatrix}$	40	40	30	3	6.3	3	0.6x0.3	58
DIN9834-032	32	$\begin{smallmatrix} +0.025 \\ 0 \end{smallmatrix}$	40		50	50	40	4				66
DIN9834-040	40		50		63	63	50	5				79
DIN9834-050	50	$\begin{smallmatrix} 0 \\ -0.019 \end{smallmatrix}$	63	71	71	56	6.3	89				
DIN9834-063	63		80	80	90	63	8	123				
DIN9834-080	80	$\begin{smallmatrix} +0.030 \\ 0 \end{smallmatrix}$	100	$\begin{smallmatrix} 0 \\ -0.022 \end{smallmatrix}$	100	112	80	10	8	1.0x0.4	143	
DIN9834-100	100	$\begin{smallmatrix} 0 \\ -0.025 \end{smallmatrix}$	125	125	140	106	12.5	10	10		168	
DIN9834-125	125		160	160	180	132	16	12	203			
DIN9834-160	160		$\begin{smallmatrix} +0.040 \\ 0 \end{smallmatrix}$	200	$\begin{smallmatrix} 0 \\ -0.029 \end{smallmatrix}$	200	220	170	16		18	243

Clamp VDI-KL(JNA)

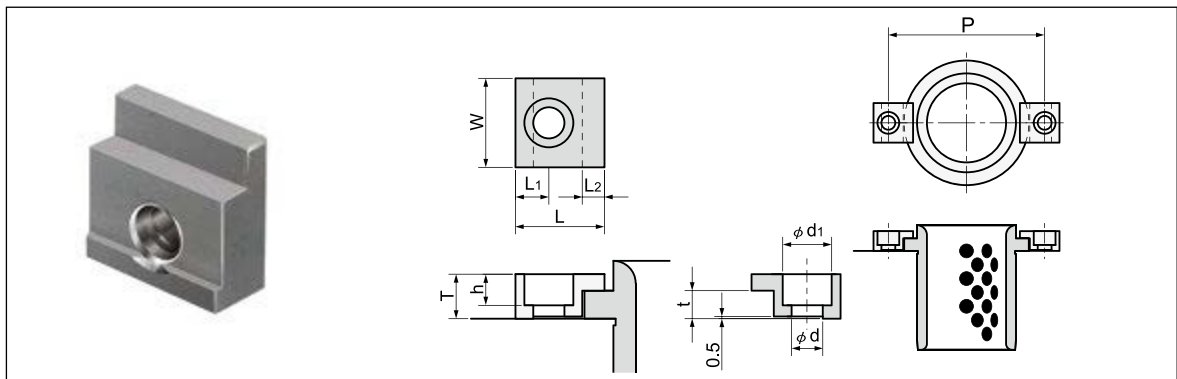

单位 (Unit): mm

型号规格 Standard No.	W	L	T	L ₁	L ₂	t	d	d ₁	h	Applicable Bushing ID
VDI-KL-6	20	20	10	7.5	5	6.3	7	11	7	Ø25~Ø50
VDI-KL-10	32	32	16	11	10	10	11.5	17.5	11.5	Ø63~Ø160